

YOISUN

优易尚

Caring For Life • Yosun Medical

关爱生命·友尚医疗

Add: No. 17, Shahong Road, Lingmen Beibaixiang Town,
Yueqing Wenzhou Zhejiang P.R. China
Postal: 325603
Fax: +86-577-61896989

FDA CE 0197 CFDA

YOISUN 优易尚

All for Healthcare
用心呵护健康



HEALTHCARE

Product Catalogue

外贸/内贸 Foreign/Domestic Trade: Jack Hwang

☎ 138-1601-6669

🌐 www.yoisun.com

✉ jack@yoisun.com

☎ 0577-61896989

温州友尚医疗科技有限公司

WENZHOU YOSUN MEDICAL TECHNOLOGY CO.,LTD.



CONTENTS

Core products include Infrared thermometer, Digital thermometer, Digital Blood Pressure Monitor, Nebulizer, Mask, etc

Company Prole

>>

- About Us P1
- Certificate P2

Thermometer Series

- Digital Clinical Thermometer P3
- Cartoon Thermometer P14
- Fast Read Thermometer P17

Infrared Thermometer Series

- Forehead Infrared Thermometer P18
- Forehead & Ear Infrared Thermometer P24
- Ear Infrared Thermometer P29

Blood Pressure Monitor Series

- Digital Blood Pressure Monitor P31
- Blood Pressure Cuff P35
- Storagr Package P36

Compressor Nebulizer Series

- Air-compressing Nebulizer P37
- Nebulizer Mask P39

ABOUT US

Your Professional Partner

Wenzhou Yosun Medical Technology Co.,Ltd was established in 2013 in Wenzhou.We are one professional manufacturer of OEM/ODM for Infrared thermometer,Digital thermometer,Digital Blood Pressure Monitor,Nebulizer ect medical devices under variety of names worldwide.

We cover an area of 10,000 square meters.

Yosun Medical Technology is known for its quality and its innovative comprehensive R&D which was originally founded in ShangHai.

Yosun is a good reputation company with quality,design and manufacturing in China. it's one of the leading OEM/ODM manufacturer for China domestic market.

Our technology strives for high quality, reliability and accuracy.We develop technology for the benefit of your health and set the quality standard just as high as for professional applications




Yosun's products have been certified by the EU (CE0197), ISO13485:2003+AC:2007 , approved FDA and by the China Food and Drug Administration (SFDA),USA FDA 510K.

In the future we want to keep on doing together what we do best!






ABOUT Certificate

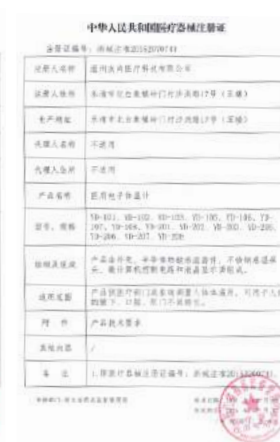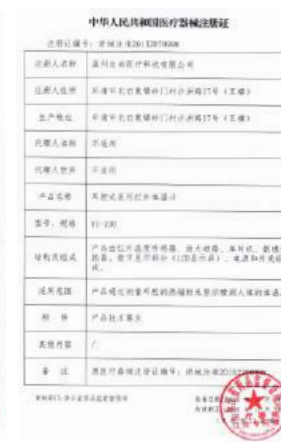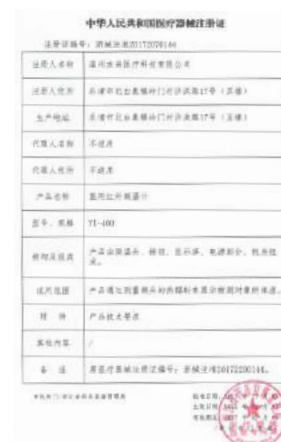YOSUN's excellent and professional group provide innovative & humanized products and services



Digital Clinical Thermometer

- 
Professional Accuracy
- 
°F/°C Switch
- 
Fever Alarm
- 
Replacing Battery
- 
Automatic shut off
- 
60sec Reading
- 
Recalls last Reading
- 
Clinically Tested

YD-101

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:20.0*7.5mm
- + Unit size:128.0*18.5*10.7mm
- + Weight: About 8g (with battery)



Digital Clinical Thermometer

- 
Professional Accuracy
- 
°F/°C Switch
- 
Fever Alarm
- 
Replacing Battery
- 
Automatic shut off
- 
60sec Reading
- 
Recalls last Reading
- 
Clinically Tested

YD-101B

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:20.0*7.5mm
- + Unit size:128.0*18.5*10.7mm
- + Weight: About 8g (with battery)



Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	140mm*98mm*145mm 20PCS/Box
Packaging	51cm*29.6cm*31.5cm 400PCS/Box Gross:11.8kg


Technical specifications

Measurement Range	32.00°C~42.90°C(89.60°F~109.20°F) Bolow 32.00°C(89.60°F)disliays Lo°C (°F) Above 42.90°C(109.20°F)displays Hi°C (°F)
Resolution	0.01 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	140mm*98mm*145mm 20PCS/Box
Packaging	51cm*29.6cm*31.5cm 400PCS/Box Gross:11.8kg

Digital Clinical Thermometer




Professional Accuracy




°F/°C Switch




Fever Alarm




Replacing Battery



Automatic shut off



60sec Reading



Recalls last Reading



Clinically Tested

YD-102

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:20.0*7.5mm
- + Unit size:126.5*18.5*10.0mm
- + Weight: About 9.3g (with battery)



Digital Clinical Thermometer



Professional Accuracy



°F/°C Switch



Fever Alarm



Replacing Battery



Automatic shut off



60sec Reading



Recalls last Reading



Clinically Tested

YD-103

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:15.7*6.7mm
- + Unit size:126.0*17.6*9.2mm
- + Weight: About 8.5g (with battery)




Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	140mm*98mm*145mm 20PCS/Box
Packaging	51cm*29.6cm*31.5cm 400PCS/Box Gross:11.8kg


Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	140mm*98mm*145mm 20PCS/Box
Packaging	51cm*29.6cm*31.5cm 400PCS/Box Gross:11.8kg


Digital Clinical Thermometer


Professional Accuracy



°F/°C Switch



Fever Alarm


Replacing Battery


Automatic shut off


60sec Reading


Recalls last Reading


Clinically Tested

YD-104

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:17.0*7.5mm
- + Unit size:127.0*18.0*10.0mm
- + Weight: About 10.6g (with battery)



Digital Clinical Thermometer


Professional Accuracy


°F/°C Switch


Fever Alarm


Replacing Battery


Automatic shut off


60sec Reading


Recalls last Reading


Clinically Tested

YD-105

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:20.0*7.5mm
- + Unit size:129.6*19.2*9.6mm
- + Weight: About 11.2 g (with battery)




Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	140mm*98mm*145mm 20PCS/Box
Packaging	51cm*29.6cm*31.5cm 400PCS/Box Gross:11.8kg

Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	140mm*98mm*145mm 20PCS/Box
Packaging	51cm*29.6cm*31.5cm 400PCS/Box Gross:11.8kg

Digital Clinical Thermometer

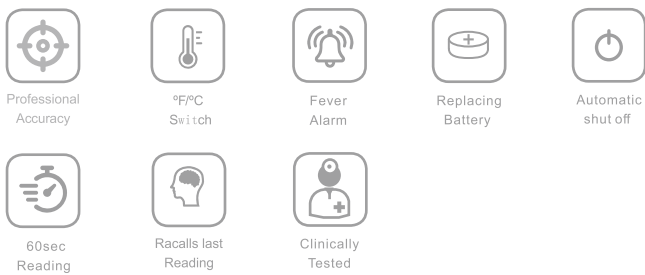

YD-106

- + 60 seconds measurement;
- + Measurement over with “Bi-Bi” sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:20.0*7.5mm
- + Unit size:128.5*17.6*9.8mm
- + Weight: About 10.0g (with battery)



Digital Clinical Thermometer



YD-201

- + 60 seconds measurement;
- + Measurement over with “Bi-Bi” sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:20.0*7.2mm
- + Unit size:128.7*18.8*10.0mm
- + Weight: About 12.0g (with battery)



Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	140mm*98mm*145mm 20PCS/Box
Packaging	51cm*29.6cm*31.5cm 400PCS/Box Gross:11.8kg

Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	140mm*98mm*145mm 20PCS/Box
Packaging	51cm*29.6cm*31.5cm 400PCS/Box Gross:11.8kg

Digital Clinical Thermometer




Professional Accuracy



°F/°C Switch



Fever Alarm



Replacing Battery



Automatic shut off



60sec Reading



Recalls last Reading



Clinically Tested



Comfortable Flexible

YD-202

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:20.0*7.5mm
- + Unit size:129.5*19.5*11.3mm
- + Weight: About 9.2g (with battery)



Digital Clinical Thermometer



Professional Accuracy



°F/°C Switch



Fever Alarm



Replacing Battery



Automatic shut off



60sec Reading



Recalls last Reading



Clinically Tested



Comfortable Flexible

YD-206

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:20.0*7.5mm
- + Unit size:125.0*19.0*12.5mm
- + Weight: About 10.6g (with battery)



Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	140mm*98mm*145mm 20PCS/Box
Packaging	51cm*29.6cm*31.5cm 400PCS/Box Gross:11.8kg

Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	140mm*98mm*145mm 20PCS/Box
Packaging	51cm*29.6cm*31.5cm 400PCS/Box Gross:11.8kg

Digital Clinical Thermometer



Professional Accuracy



°F/°C Switch



Fever Alarm



Replacing Battery



Automatic shut off



60sec Reading



Recalls last Reading



Clinically Tested



Comfortable Flexible

YD-207

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:20.0*7.5mm
- + Unit size:129.0*19.3*11.7mm
- + Weight: About 11.6g (with battery)



Digital Clinical Thermometer



Professional Accuracy



°F/°C Switch



Fever Alarm



Replacing Battery



Automatic shut off



60sec Reading



Recalls last Reading



Clinically Tested



Comfortable Flexible

YD-206(Frog)

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:20.0*7.5mm
- + Unit size:141.0*29.0*14.7mm
- + Weight: About 13.1g (with battery)



Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	140mm*98mm*145mm 20PCS/Box
Packaging	51cm*29.6cm*31.5cm 400PCS/Box Gross:11.8kg

Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	168mm*178mm*151mm 20PCS/Box
Packaging	50.5cm*36.1cm*30.7cm 240PCS/Box Gross:11.0kg

Digital Clinical Thermometer

- 
Professional Accuracy
- 
°F/°C Switch
- 
Fever Alarm
- 
Replacing Battery
- 
Automatic shut off
- 
60sec Reading
- 
Recalls last Reading
- 
Clinically Tested
- 
Comfortable Flexible

YD-206(Dog)

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:19.5*7.3mm
- + Unit size:141.0*24.0*16.5mm
- + Weight: About 13.1g (with battery)



Digital Clinical Thermometer

- 
Professional Accuracy
- 
°F/°C Switch
- 
Fever Alarm
- 
Replacing Battery
- 
Automatic shut off
- 
60sec Reading
- 
Recalls last Reading
- 
Clinically Tested
- 
Comfortable Flexible

YD-206(Duck)

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:20.0*7.5mm
- + Unit size:141.0*23.0*16.5mm
- + Weight: About 12.8g (with battery)




Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	200mm*178mm*151mm 20PCS/Box
Packaging	60cm*36.1cm*30.7cm 240PCS/Box Gross:11.3kg

Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V LR41
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	200mm*178mm*151mm 20PCS/Box
Packaging	60cm*36.1cm*30.7cm 240PCS/Box Gross:11.3kg

Fast Read Thermometer

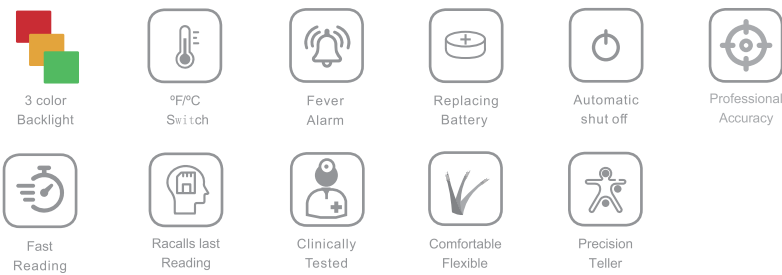

YD-203

- + Fast 16 second reading
- + For use orally, rectally or under the arm Optional Precision Teller :
- + Last memory recall
- + Comfortable flexible
- + Water resistant sensor-tip
- + Reads in Fahrenheit or Celcius (°C or °F)
- + LCD size:26.0*15.0 mm
- + Unit size:133.5*31.0*14.3 mm
- + Weight: About 21.0g (with battery)



Digital Clinical Thermometer



YD-205

- + 60 seconds measurement;
- + Measurement over with "Bi-Bi" sound;
- + Last memory recall;
- + Low voltage warning
- + Water resistant sensor-tip;
- + °C or °F is optional
- + LCD size:26.0*15.0mm
- + Unit size:133.5*31.0*14.3 mm
- + Weight: About 20g (with battery)




Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC3.0V CR1632
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	188mm*128mm*108mm 10PCS/Box
Packaging	38cm*63cm*21.5cm 200PCS/Box Gross:11.8kg

Technical specifications

Measurement Range	32.0°C~42.9°C(89.6°F~109.2°F) Bolow 32.0°C(89.6°F)disliays Lo°C (°F) Above 42.9°C(109.2°F)displays Hi°C (°F)
Resolution	0.1 °C(°F)
Display	Liquid crystal diaplay 3 1/2 dibits
Display	LCD backlight
Battery	DC1.5V CR1130
Power Consumption	0.40 milliwatts in measurement mode
Memory	Built-in memory enabling display of previously measured value
Beeper	10seconds sound signal when peak tempeature reached
Operational conditions	Temperature:5°C-40°C (41°F-104°F) Humidity:≤93%RH,non-condensing Atmospheric pressure:70-106 kPa
Battery Life	More than 160 hours of continuous operation
Packing size	188mm*128mm*108mm 10PCS/Box
Packaging	38cm*63cm*21.5cm 200PCS/Box Gross:11.8kg

Non-contact
Forehead Infrared Thermometer

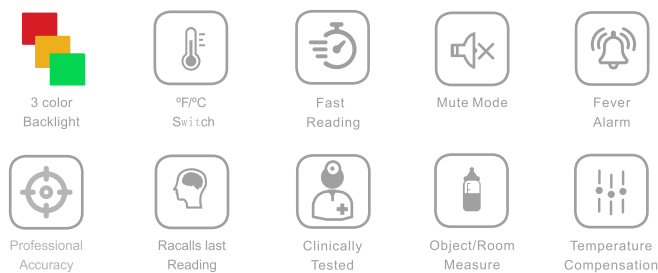

YI-400


- + 1 Second Reading
- + Fever Alarm
- + Memory recall of 32 reading
- + Low voltage warning
- + Backlight function optional
- + Switching between Fahrenheit and Celsius.
- + LCD size:31.5*30.5mm
- + Unit size:160*95*46mm
- + Weight: About 144g (with battery)



Technical specifications

Measurement range	Forehead:32.0°C-42.9°C(89.6°F-109.2°F) Object:0°C-100°C(32°F-212°F)
Measuring accuracy	Forehead mode:±0.2°C/±0.4°F Object mode :±1.0°C/1.8°F
Measuring distance	1-3cm
Display	LCD backlight
Resolution	0.1 °C / 0.1 °F
Automatic shutdown	15s±1s
Memory	Memory 32 groups of measured temperature
Fever alarm	Normal green:32°C≤T≤37.5°C(89.6°F-99.5°F) Low fever:37.6°C≤T≤37.9°C(99.7°F-100.2°F) High fever:38.0°C≤T≤42.9°C(100.4°F-109.2°F)
Operational conditions	Temperature:10°C-40°C (50°F-104°F) Humidity:15-95%RH,non-condensing Atmospheric pressure:86-106 kPa
Battery	2*AA,can be used for more than 3000 times
Packing size	195 mm*138mm*50mm
Full set weight	216g(including products/Blister/instructions/battery)
Packaging	71.5cm*27.0cm*41.0cm 50pcs/Box Gross:12.0kg

Non-contact
Forehead Infrared Thermometer

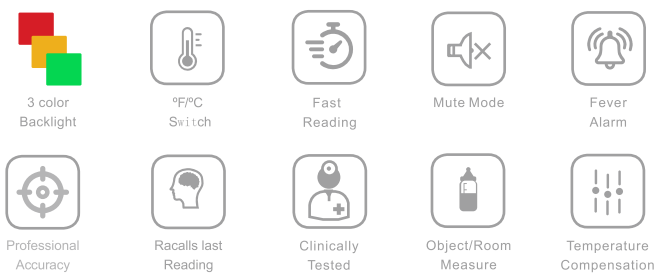

YI-401


- + 1 Second Reading
- + Fever Alarm
- + Memory recall of 32 reading
- + Low voltage warning
- + Backlight function optional
- + Switching between Fahrenheit and Celsius.
- + LCD size:27.0*24.0mm
- + Unit size:148*95*42mm
- + Weight: About 150g (with battery)



Technical specifications

Measurement range	Forehead:32.0°C-42.9°C(89.6°F-109.2°F) Object:0°C-100°C(32°F-212°F)
Measuring accuracy	Forehead mode:±0.2°C/±0.4°F Object mode :±1.0°C/1.8°F
Measuring distance	1-3cm
Display	LCD backlight
Resolution	0.1 °C / 0.1 °F
Automatic shutdown	15s±1s
Memory	Memory 32 groups of measured temperature
Fever alarm	Normal green:32°C≤T≤37.5°C(89.6°F-99.5°F) Low fever:37.6°C≤T≤37.9°C(99.7°F-100.2°F) High fever:38.0°C≤T≤42.9°C(100.4°F-109.2°F)
Operational conditions	Temperature:10°C-40°C (50°F-104°F) Humidity:15-95%RH,non-condensing Atmospheric pressure:86-106 kPa
Battery	2*AA,can be used for more than 3000 times
Packing size	195 mm*138mm*50mm
Full set weight	216g(including products/Blister/instructions/battery)
Packaging	71.5cm*27.0cm*41.0cm 50pcs/Box Gross:12.0kg

Non-contact
Forehead Infrared Thermometer

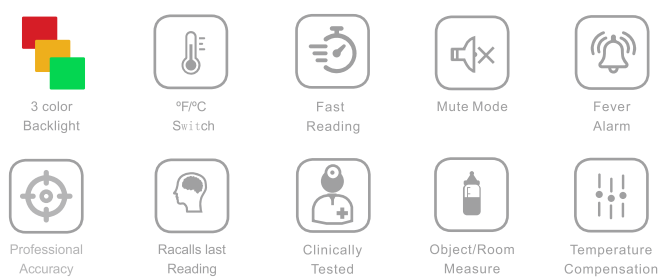

YI-402


- + 1 Second Reading
- + Fever Alarm
- + Memory recall of 9 reading
- + Low voltage warning
- + Backlight function optional
- + Switching between Fahrenheit and Celsius.
- + LCD size:24*24mm
- + Unit size:144*40*31mm
- + Weight: About 60g (with battery)



Technical specifications

Measurement range	Forehead:32.0°C-42.9°C(89.6°F-109.2°F) Object:0°C-100°C(32°F-212°F)
Measuring accuracy	Forehead mode:±0.2°C/±0.4°F Object mode :±1.0°C/1.8°F
Measuring distance	1-3cm
Display	LCD backlight
Resolution	0.1 °C / 0.1 °F
Automatic shutdown	15s±1s
Memory	Memory 9 groups of measured temperature
Fever alarm	Normal green:32°C≤T≤37.5°C(89.6°F-99.5°F) Low fever:37.6°C≤T≤37.9°C(99.7°F-100.2°F) High fever:38.0°C≤T≤42.9°C(100.4°F-109.2°F)
Operational conditions	Temperature:10°C-40°C (50°F-104°F) Humidity:15-95%RH,non-condensing Atmospheric pressure:86-106 kPa
Battery	2*AAA,can be used for more than 3000 times
Packing size	180mm*110mm*50mm
Full set weight	105g(including products/Blister/instructions/battery)
Packaging	38.0cm*28.0cm*57.5cm 50pcs/Box Gross:8.5kg

Non-contact
Forehead Infrared Thermometer

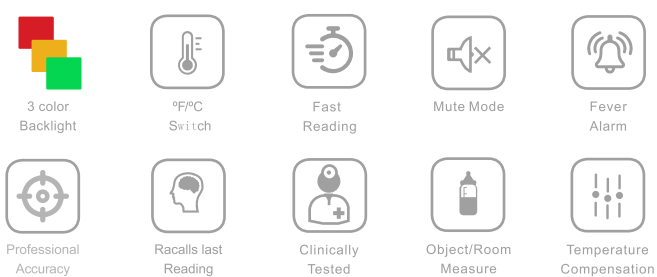

YI-403


- + 1 Second Reading
- + Fever Alarm
- + Memory recall of 32 reading
- + Low voltage warning
- + Backlight function optional
- + Switching between Fahrenheit and Celsius.
- + LCD size:30.8*24.0mm
- + Unit size:155*105*46mm
- + Weight: About 180g (with battery)



Technical specifications

Measurement range	Forehead:32.0°C-42.9°C(89.6°F-109.2°F) Object:0°C-100°C(32°F-212°F)
Measuring accuracy	Forehead mode:±0.2°C/±0.4°F Object mode :±1.0°C/1.8°F
Measuring distance	1-3cm
Display	LCD backlight
Resolution	0.1 °C / 0.1 °F
Automatic shutdown	15s±1s
Memory	Memory 32 groups of measured temperature
Fever alarm	Normal green:32°C≤T≤37.5°C(89.6°F-99.5°F) Low fever:37.6°C≤T≤37.9°C(99.7°F-100.2°F) High fever:38.0°C≤T≤42.9°C(100.4°F-109.2°F)
Operational conditions	Temperature:10°C-40°C (50°F-104°F) Humidity:15-95%RH,non-condensing Atmospheric pressure:86-106 kPa
Battery	2*AA,can be used for more than 3000 times
Packing size	195 mm*138mm*50mm
Full set weight	216g(including products/Blister/instructions/battery)
Packaging	71.5cm*27.0cm*41.0cm 50pcs/Box Gross:12.0kg

Non-contact
Forehead Infrared Thermometer

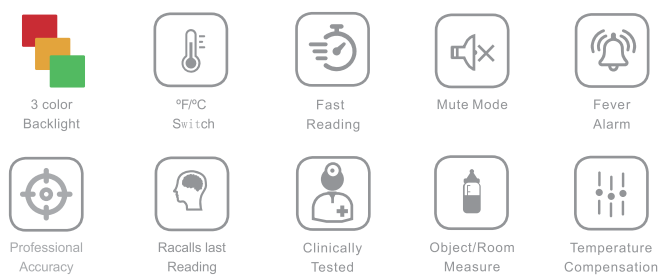

YI-405


- + 1 Second Reading
- + Fever Alarm
- + Memory recall of 32 reading
- + Low voltage warning
- + Backlight function optional
- + Switching between Fahrenheit and Celsius.
- + LCD size:24.8*21.7mm
- + Unit size:150*85*44mm
- + Weight: About 115g (with battery)



Technical specifications

Measurement range	Forehead:32.0°C-42.9°C(89.6°F-109.2°F) Object:0°C-100°C(32°F-212°F)
Measuring accuracy	Forehead mode:±0.2°C/±0.4°F Object mode :±1.0°C/1.8°F
Measuring distance	1-3cm
Display	LCD backlight
Resolution	0.1 °C / 0.1 °F
Automatic shutdown	15s±1s
Memory	Memory 32 groups of measured temperature
Fever alarm	Normal green:32°C≤T≤37.5°C(89.6°F-99.5°F) Low fever:37.6°C≤T≤37.9°C(99.7°F-100.2°F) High fever:38.0°C≤T≤42.9°C(100.4°F-109.2°F)
Operational conditions	Temperature:10°C-40°C (50°F-104°F) Humidity:15-95%RH,non-condensing Atmospheric pressure:86-106 kPa
Battery	2*AAA,can be used for more than 3000 times
Packing size	170 mm*120mm*60mm
Full set weight	216g(including products/Blister/instructions/battery)
Packaging	61.5cm*35.5cm*31.5cm 50pcs/Box Gross:10.5kg

Non-contact
Forehead Infrared Thermometer

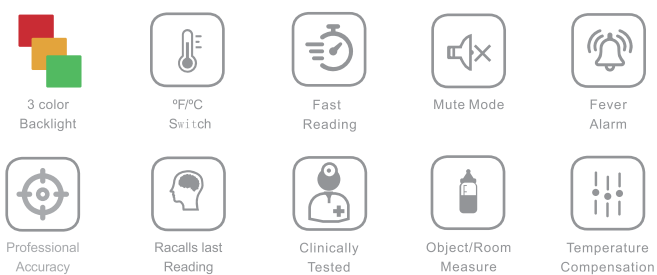

YI-406


- + 1 Second Reading
- + Fever Alarm
- + Memory recall of 32 reading
- + Low voltage warning
- + Backlight function optional
- + Switching between Fahrenheit and Celsius.
- + LCD size:24.8*21.7mm
- + Unit size:135*77*39mm
- + Weight: About 91g (with battery)



Technical specifications

Measurement range	Forehead:32.0°C-42.9°C(89.6°F-109.2°F) Object:0°C-100°C(32°F-212°F)
Measuring accuracy	Forehead mode:±0.2°C/±0.4°F Object mode :±1.0°C/1.8°F
Measuring distance	1-3cm
Display	LCD backlight
Resolution	0.1 °C / 0.1 °F
Automatic shutdown	15s±1s
Memory	Memory 32 groups of measured temperature
Fever alarm	Normal green:32°C≤T≤37.5°C(89.6°F-99.5°F) Low fever:37.6°C≤T≤37.9°C(99.7°F-100.2°F) High fever:38.0°C≤T≤42.9°C(100.4°F-109.2°F)
Operational conditions	Temperature:10°C-40°C (50°F-104°F) Humidity:15-95%RH,non-condensing Atmospheric pressure:86-106 kPa
Battery	2*AAA,can be used for more than 3000 times
Packing size	155 mm*95mm*50mm
Full set weight	195g(including products/Blister/instructions/battery)
Packaging	32.0cm*27.0cm*48.5cm 50pcs/Box Net: 10.5KG

Forehead & Ear
Infrared Thermometer

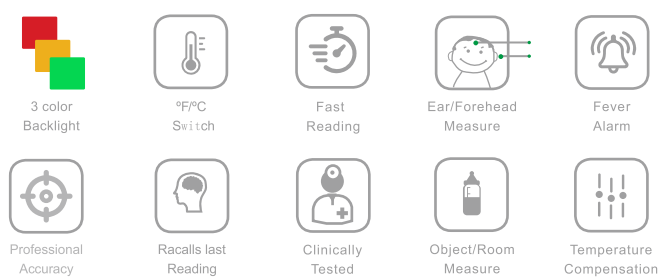

YI-100


- + 1 Second Reading
- + Fever Alarm
- + Memory recall of 9 reading
- + Low voltage warning
- + Backlight function optional
- + Switching between Fahrenheit and Celsius.
- + LCD size:44*16mm
- + Unit size:150*41*44mm
- + Weight: About 80g (with battery)



Technical specifications

Measurement range	Forehead:32.0°C-44.0°C(89.6°F-111.2°F) Object:0°C-100°C(32°F-212°F)
Measuring accuracy	Forehead mode:±0.2°C/±0.4°F Object mode :±1.0°C/1.8°F
Measuring Time	1s
Display	LCD backlight
Resolution	0.1 °C / 0.1 °F
Automatic shutdown	30s±1s
Memory	Memory 9 groups of measured temperature
Fever alarm	Normal green:32°C≤T≤37.5°C(89.6°F-99.5°F) Low fever:37.6°C≤T≤37.9°C(99.7°F-100.2°F) High fever:38.0°C≤T≤44.0°C(100.4°F-111.2°F)
Operational conditions	Temperature:10°C-40°C (50°F-104°F) Humidity:15-95%RH,non-condensing Atmospheric pressure:86-106 kPa
Battery	2*AAA,can be used for more than 3000 times
Packing size	180 mm*110mm*52mm
Full set weight	113g(including products/Blister/instructions/battery)
Packaging	38.0cm*28.0cm*57.5cm 50pcs/Box Gross:8.3kg

Forehead & Ear
Infrared Thermometer

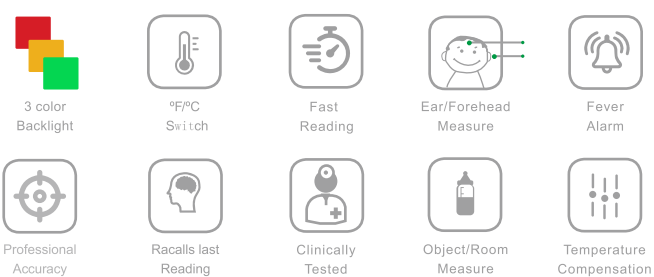

YI-100A


- + 1 Second Reading
- + Fever Alarm
- + Memory recall of 9 reading
- + Low voltage warning
- + Backlight function optional
- + Switching between Fahrenheit and Celsius.
- + LCD size:24*24mm
- + Unit size:151*39*38mm
- + Weight: About 77g (with battery)



Technical specifications

Measurement range	Forehead:32.0°C-44.0°C(89.6°F-111.2°F) Object:0°C-100°C(32°F-212°F)
Measuring accuracy	Forehead mode:±0.2°C/±0.4°F Object mode :±1.0°C/1.8°F
Measuring Time	1s
Display	LCD backlight
Resolution	0.1 °C / 0.1 °F
Automatic shutdown	30s±1s
Memory	Memory 9 groups of measured temperature
Fever alarm	Normal green:32°C≤T≤37.5°C(89.6°F-99.5°F) Low fever:37.6°C≤T≤37.9°C(99.7°F-100.2°F) High fever:38.0°C≤T≤44.0°C(100.4°F-111.2°F)
Operational conditions	Temperature:10°C-40°C (50°F-104°F) Humidity:15-95%RH,non-condensing Atmospheric pressure:86-106 kPa
Battery	2*AAA,can be used for more than 3000 times
Packing size	180 mm*110mm*52mm
Full set weight	113g(including products/Blister/instructions/battery)
Packaging	38.0cm*28.0cm*57.5cm 50pcs/Box Gross:8.0kg

Forehead & Ear
Infrared Thermometer

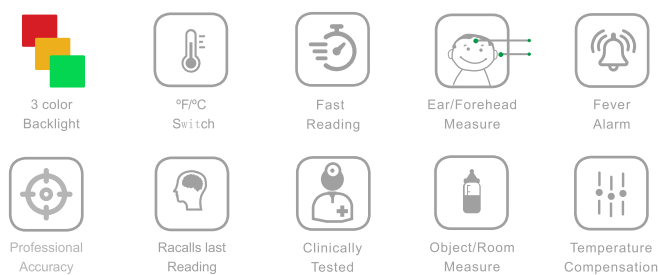

YI-100C


- + 1 Second Reading
- + Fever Alarm
- + Memory recall of 9 reading
- + Low voltage warning
- + Backlight function optional
- + Switching between Fahrenheit and Celsius.
- + LCD size:26*20mm
- + Unit size:114*33*24mm
- + Weight: About 48g (with battery)



Technical specifications

Measurement range	Forehead:32.0°C-44.0°C(89.6°F-111.2°F) Object:0°C-100°C(32°F-212°F)
Measuring accuracy	Forehead mode:±0.2°C/±0.4°F Object mode :±1.0°C/1.8°F
Measuring Time	1s
Display	LCD backlight
Resolution	0.1 °C / 0.1 °F
Automatic shutdown	30s±1s
Memory	Memory 9 groups of measured temperature
Fever alarm	Normal green:32°C≤T≤37.5°C(89.6°F-99.5°F) Low fever:37.6°C≤T≤37.9°C(99.7°F-100.2°F) High fever:38.0°C≤T≤44.0°C(100.4°F-111.2°F)
Operational conditions	Temperature:10°C-40°C (50°F-104°F) Humidity:15-95%RH,non-condensing Atmospheric pressure:86-106 kPa
Battery	CR2032,can be used for more than 3000 times
Packing size	117 mm*150mm*50mm
Full set weight	113g(including products/Blister/instructions/battery)
Packaging	60.5cm*31.5cm*26.8cm 50pcs/Box Gross:10.0kg

Forehead & Ear
Infrared Thermometer

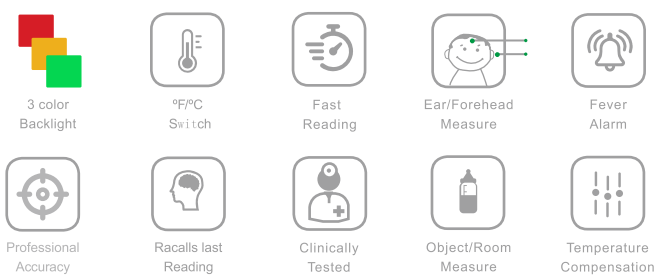

YI-100D

- + 1 Second Reading
- + Fever Alarm
- + Memory recall of 9 reading
- + Low voltage warning
- + Backlight function optional
- + Switching between Fahrenheit and Celsius.
- + LCD size: 22.5*22.3mm
- + Unit size:143*46*34mm
- + Weight: About 75g (with battery)



Technical specifications

Measurement range	Forehead:32.0°C-44.0°C(89.6°F-111.2°F) Object:0°C-100°C(32°F-212°F)
Measuring accuracy	Forehead mode:±0.2°C/±0.4°F Object mode :±1.0°C/1.8°F
Measuring Time	1s
Display	LCD backlight
Resolution	0.1 °C / 0.1 °F
Automatic shutdown	30s±1s
Memory	Memory 9 groups of measured temperature
Fever alarm	Normal green:32°C≤T≤37.5°C(89.6°F-99.5°F) Low fever:37.6°C≤T≤37.9°C(99.7°F-100.2°F) High fever:38.0°C≤T≤44.0°C(100.4°F-111.2°F)
Operational conditions	Temperature:10°C-40°C (50°F-104°F) Humidity:15-95%RH,non-condensing Atmospheric pressure:86-106 kPa
Battery	2*AAA,can be used for more than 3000 times
Packing size	170 mm*70mm*50mm
Full set weight	113g(including products/Blister/instructions/battery)
Packaging	51.5cm*36.5cm*31.5cm 100pcs/Box Gross:8.3kg

Ear Infrared Thermometer

- Professional Accuracy
- °F/°C Switch
- Fast Reading
- Infrared Technology
- Fever Alarm
- Recalls last Reading
- Clinically Tested
- Object/Room Measure
- Temperature Compensation

YI-100B

- + 1 Second Reading
- + Fever Alarm
- + Memory recall of 9 reading
- + Low voltage warning
- + Backlight function optional
- + Switching between Fahrenheit and Celsius.
- + LCD size:21*12mm
- + Unit size:135*70*38mm
- + Weight: About 67g (with battery)




Technical specifications

Measurement range	Ear:32.0°C-44.0°C(89.6°F-111.2°F) Object:0°C-100°C(32°F-212°F)
Measuring accuracy	Ear mode:±0.2°C/±0.4°F Object mode :±1.0°C/1.8°F
Measuring Time	1s
Display	LCD backlight
Resolution	0.1 °C / 0.1 °F
Automatic shutdown	30s±1s
Memory	Memory 9 groups of measured temperature
Fever alarm	Normal green:32°C≤T≤37.5°C(89.6°F-99.5°F) Low fever:37.6°C≤T≤37.9°C(99.7°F-100.2°F) High fever:38.0°C≤T≤44.0°C(100.4°F-111.2°F)
Operational conditions	Temperature:10°C-40°C (50°F-104°F) Humidity:15-95%RH,non-condensing Atmospheric pressure:86-106 kPa
Battery	2*AAA,can be used for more than 3000 times
Packing size	180 mm*110mm*50mm
Full set weight	127g(including products/Blister/instructions/battery)
Packaging	38.0cm*28.0cm*57.5cm 50pcs/Box Gross:8.0kg

ATRIAL FIBRILLATION DETECTIVE

What is Atrial Fibrillation?

The most common sustained rhythm abnormality, atrial fibrillation incidence rate of 1%, with age increasing for age over 65 , incidence of atrial fibrillation up to 10%. The human heart has two upper chambers and two lower chambers. The upper chambers are called the *left atrium* and the *right atrium* – the plural of *atrium* is *atria*. The two lower chambers are the the *left ventricle* and the *right ventricle*. When the two upper chambers - the atria - contract at an excessively high rate, and in an irregular way, the patient has atrial fibrillation chambers (two atria) and chambers (two ventricles) are not in harmony Usually heartbeat acceleration or deceleration results in inadequate blood flow to the body. heart palpitations,polypnea, and cause a stroke. (number one in the world cause of death was chronic Cerebrovascular disease)



What are the main causes of Atrial Fibrillation?


- Hypertension
- Obesity
- Heart Disease
- Diabetes
- Hyperthyroidism
- Lung cancer/Emphysema
- Chronic Renal Disease
- Irritant effect (alcohol / caffeine / drug / alcoho

What are the symptoms of Atrial Fibrillation?

Most patients with atrial fibrillation without obvious symptoms. Fewer patients will have the following symptoms : palpitations (rapid heartbeat ,hypotension , weakness, dizziness, unconsciousness, polypnea , choking feeling .


How can Atrial Fibrillation lead to STROKE?

Patients with atrial fibrillation face serious risk of stroke, with irregular Atrial Fibrillation, blood flow into the heart, and the formation of blood clots in the atria, blood clots associated with heart Pumping, flow to the patient's brain to form stroke. The human brain can not get enough oxygen and Nutrients can cause permanent brain damage (paralysis), or even death. Atrial Fibrillation is a major cause of stroke killer. (at least 20% of stroke is due to previously undiagnosed AFib)

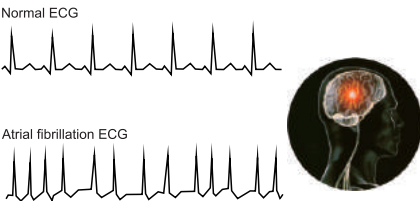


What are the treatment options for Atrial Fibrillation?

Combei technology with its leading technology develops the atrial fibrillation (AFIB) home use sphygmomanometer . to help patients understand their own health, to facilitate treatment of atrial fibrillation to avoid permanent brain damage and death consequences.

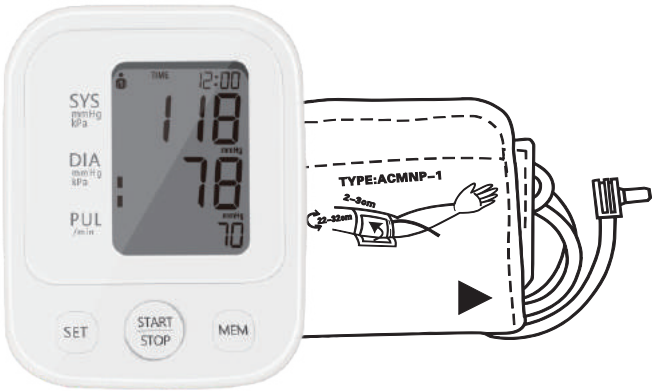

Combei intelligent electronic sphygmomanometer BP200A is a home use monitoring atrial fibrillation patent Sphygmomanometer by combei innovative patented technology to monitor the pulse of the rhythm analysis, Accurately determine the atrial fibrillation alerts

Comparison of Individual & the three-sequential device reading to the rhythm as determined by the EKG readings

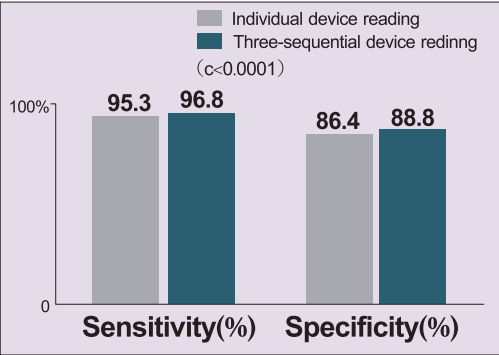

FULLY AUTOMATIC
Digital Blood Pressure Monitor
EASY OPERATION WITH ONE- BUTTON TO START AND STOP MEASUREMENT



- YB-800**
- + Intelligent pressure
 - + HAD (Heart pulse Arrhythmia Detection)
 - + Average for last 3 measurements
 - + 120 memory x 2 users
 - + Low voltage warning
 - + Backlight function optional
 - + The power converter
 - + LCD size:78.5*60.5mm
 - + Unit size:131*111*79mm
 - + Weight: About 620g (battery and cuff included)



Technical specifications

Measurement Procedure:	Oscillometric , corresponding to Korotkoff method: Phase I : systolic , Phase V : diastolic
Display:	Digital display
Measuring range:	Pressure: 30 to 280 mmHg (in 1 mmHg increment) Pulse: 40 to 199 beat/minute
Static accuracy:	Pressure: ±3mmHg / Pulse: ±5% of reading
Measuring resolution :	1mmHg
Inflation:	Automatic inflation by internal pump
Decompression:	Constant exhaust valve system
Power source:	4-size "AA" alkaline Batteries
Operation temperature:	5~40°C/41~104°F
Operation humidity:	15%~80%RH maximum
Storage temperature:	-20~+55°C/-4~+131°F
Storage humidity:	10%~90%RH maximum
Cuff pressure display range:	0~295mmHg/0~38.7kPa
Safety classifications:	Type BF Applied part device
Mode of operation:	Continuous operation
Protection against ingress of water:	IPX0
Accessories:	M size Cuff , 4 "AA" batteries, instruction manual

FULLY AUTOMATIC
Digital Blood Pressure Monitor
EASY OPERATION WITH ONE- BUTTON TO START AND STOP MEASUREMENT




- YB-801**
- + Intelligent pressure
 - + HAD (Heart pulse Arrhythmia Detection)
 - + Average for last 3 measurements
 - + 120 memory x 2 users
 - + Low voltage warning
 - + Backlight function optional
 - + The power converter
 - + LCD size:78.5*60.5mm
 - + Unit size:131*111*79mm
 - + Weight: About 620g (battery and cuff included)



Technical specifications

Measurement Procedure:	Oscillometric , corresponding to Korotkoff method: Phase I : systolic , Phase V : diastolic
Display:	Digital display
Measuring range:	Pressure: 30 to 280 mmHg (in 1 mmHg increment) Pulse: 40 to 199 beat/minute
Static accuracy:	Pressure: ±3mmHg / Pulse: ±5% of reading
Measuring resolution :	1mmHg
Inflation:	Automatic inflation by internal pump
Decompression:	Constant exhaust valve system
Power source:	4-size "AA" alkaline Batteries
Operation temperature:	5~40°C/41~104°F
Operation humidity:	15%~80%RH maximum
Storage temperature:	-20~+55°C/-4~+131°F
Storage humidity:	10%~90%RH maximum
Cuff pressure display range:	0~295mmHg/0~38.7kPa
Safety classifications:	Type BF Applied part device
Mode of operation:	Continuous operation
Protection against ingress of water:	IPX0
Accessories:	M size Cuff , 4 "AA" batteries, instruction manual


FULLY AUTOMATIC
Digital Blood Pressure Monitor
EASY OPERATION WITH ONE- BUTTON TO START AND STOP MEASUREMENT


Three Colours Backlight


120 memory x 2 users


2 users


WHO Indicator


Adapter DC 6V


Low Voltage Warning


Arrhythmia

YB-802


- + Intelligent pressure
- + HAD (Heart pulse Arrhythmia Detection)
- + Average for last 3 measurements
- + 120 memory x 2 users
- + Low voltage warning
- + Backlight function optional
- + The power converter
- + LCD size:64.5*45.5mm
- + Unit size:132*102*81mm
- + Weight: About 455g (battery and cuff included)



Technical specifications


Measurement Procedure:	Oscillometric , corresponding to Korotkoff method: Phase I : systolic , Phase V : diastolic
Display:	Digital display
Measuring range:	Pressure: 30 to 280 mmHg (in 1 mmHg increment) Pulse: 40 to 199 beat/minute
Static accuracy:	Pressure: ±3mmHg / Pulse: ±5% of reading
Measuring resolution :	1mmHg
Inflation:	Automatic inflation by internal pump
Decompression:	Constant exhaust valve system
Power source:	4-size "AA" alkaline Batteries
Operation temperature:	5~40°C/41~104°F
Operation humidity:	15%~80%RH maximum
Storage temperature:	-20~+55°C/-4~+131°F
Storage humidity:	10%~90%RH maximum
Cuff pressure display range:	0~295mmHg/0~38.7kPa
Safety classifications:	Type BF Applied part device
Mode of operation:	Continuous operation
Protection against ingress of water:	IPX0
Accessories:	M size Cuff , 4 "AA" batteries, instruction manual

FULLY AUTOMATIC
Digital Blood Pressure Monitor
EASY OPERATION WITH ONE- BUTTON TO START AND STOP MEASUREMENT



Three Colours Backlight



120 memory x 2 users


2 users


WHO Indicator


Adapter DC 6V


Low Voltage Warning


Arrhythmia

YB-803

- + Intelligent pressure
- + HAD (Heart pulse Arrhythmia Detection)
- + Average for last 3 measurements
- + 120 memory x 2 users
- + Low voltage warning
- + Backlight function optional
- + The power converter
- + LCD size:64.5*45.5mm
- + Unit size:135*117*71mm
- + Weight: About 455g (battery and cuff included)



Technical specifications

Measurement Procedure:	Oscillometric , corresponding to Korotkoff method: Phase I : systolic , Phase V : diastolic
Display:	Digital display
Measuring range:	Pressure: 30 to 280 mmHg (in 1 mmHg increment) Pulse: 40 to 199 beat/minute
Static accuracy:	Pressure: ±3mmHg / Pulse: ±5% of reading
Measuring resolution :	1mmHg
Inflation:	Automatic inflation by internal pump
Decompression:	Constant exhaust valve system
Power source:	4-size "AA" alkaline Batteries
Operation temperature:	5~40°C/41~104°F
Operation humidity:	15%~80%RH maximum
Storage temperature:	-20~+55°C/-4~+131°F
Storage humidity:	10%~90%RH maximum
Cuff pressure display range:	0~295mmHg/0~38.7kPa
Safety classifications:	Type BF Applied part device
Mode of operation:	Continuous operation
Protection against ingress of water:	IPX0
Accessories:	M size Cuff , 4 "AA" batteries, instruction manual

CUFF I

- ☐ PVC: 600 cm
- ☐ Cuff size:
 - ☐ 22~32 cm
 - ☐ 22~42 cm
 - ☐ Other



CUFF II

- ☐ PVC: 600 cm
- ☐ Cuff size:
 - ☐ 22~32 cm
 - ☐ 22~42 cm
 - ☐ Other



Zipper Bag A

- ☐ Size: 155X115mm
- ☐ Material: Non woven fabric



Zipper Bag B

- ☐ Size: 155X115mm
- ☐ Material: 70D PVC



Zipper Bag C

- ☐ Size: 155X115mm
- ☐ Polyester 420D



Zipper Bag D

- ☐ Material: 600D



String Bag E

- ☐ Material: Polyester 420D










String Bag F

- ☐ Material: Polyester 420D



Air-compressing Nebulizer

- 
No oil Pump
- 
Big Atomization
- 
Medical Grade
- 
Smooth Appearance
- 
Low Noise
- 
Polymer Filter
- 
Easy Shuttle

YN-600








- + Latex free
- + Easy to clean
- + Ideal for all ages
- + Medical Grade
- + Be easy to carry about
- + Aerosolmist foreasyinhalation
- + Complete Nebulizer kit included
- + Unit size:190*171*59mm
- + Weight: About 1.2kg



Technical specifications

Voltage	AC 220V/50Hz
Power	≤180VA
Medication Capacity	8 ml
Particle Size	3.5μm±25%
Sound Level	≤65 dB(A) (1 meter away)
Average Nebulization Rate	≥0.2mL/min (0.9% saline water)
Compressor Pressure Range	19 - 58psi (130-400KPa)
Operating Pressure Range	8.7 -19psi (60-130KPa)
Liter Flow Range	≥6L/Min
Operating Temperature Range	5°C ~ 40°C (41°F ~ 104°F)
Operating Humidity Range	15%~85%RH
Storage Temperature Range	-20°C~55°C(-4°F~131°F)
Dimension	196mmX170mmX105mm
Weight	1.23 kg
Standard Accessories	Nebulizer, Air Tube, Adult Mask, Child's Mask Mouthpiece, Filters (5)
Use life	5 years

Air-compressing Nebulizer

- 
No oil Pump
- 
Big Atomization
- 
Medical Grade
- 
Smooth Appearance
- 
Low Noise
- 
Polymer Filter
- 
Easy Shuttle

YN-601

- + Latex free
- + Easy to clean
- + Ideal for all ages
- + Medical Grade
- + Be easy to carry about
- + Aerosolmist foreasyinhalation
- + Complete Nebulizer kit included
- + Unit size:278*170*90mm
- + Weight: About 1.6kg




Technical specifications

Voltage	AC 220V/50Hz
Power	168VA
Medication Capacity	8 ml
Particle Size	0.5-10μm
Sound Level	≤65 dB(A) (1 meter away)
Average Nebulization Rate	≥0.25mL/min (0.9% saline water)
Compressor Pressure Range	22 - 58psi (150-400KPa)
Operating Pressure Range	9.5 -19psi (65-130KPa)
Liter Flow Range	≥6.7L/Min
Operating Temperature Range	5°C ~ 40°C (41°F ~ 104°F)
Operating Humidity Range	10% ~ 95% RH
Storage Temperature Range	-25°C ~ 60°C (-13°F to 140°F)
Dimension	278x170x90mm
Weight	1.25kg
Standard Accessories	Nebulizer, Air Tube, Adult Mask, Child's Mask Mouthpiece, Filters (5)
Use life	5 years

product Features

- Single patient use
- Hand-hold Nebulizer in 8cc volume
- Designed for children as well as adults, with mask or mouthpiece for inhalation
- Suitable for all types of air compressing nebulizer, provides directional flow to mouth and nose

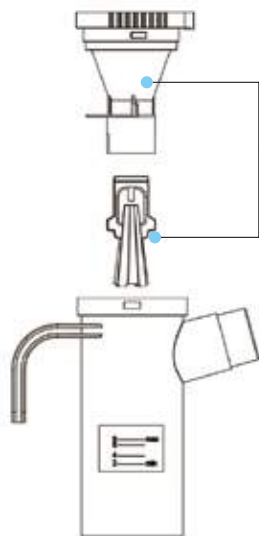

Output rate ≥ 0.3 ml/min ,with low medicine residual amount.



Ref No.	Hand-hlod Nebulizer Cup	Mask	Oxygen Tubing	Mouth Piece
2AMS08BA	8 cc-Askew	Adult -II	1.8m\5mm	1 pc
2AMS08BH	8 cc-Horizontal	Adult -II	1.8m\5mm	1 pc
2PMS08BA	8 cc-Askew	Child-II	1.8m\5mm	1 pc
2PMS08BH	8 cc-Horizontal	Child-II	1.8m\5mm	1 pc

product Features

- Single-patient use
- Leak-proof seal ideally suited for aerosol inhalation, ensures efficient use of medication
- Adjustable straps to provide ultimate comfort
- Made from DEHP/ Latex free material



Output rate ≥ 0.2 ml/min , produces concentrated mist at a flow setting at small atomized particle



Ref No.	Nebulizer Cup	Mask	Oxygen Tubing	Mouth Piece	Mouth Piece	Corrugated Tubing
1AM06B	6cc	Adult	1.8m\5mm	1 pc	1 pc	/
1PM06B	6cc	Child	1.8m\5mm	1 pc	1 pc	/
306B	6cc	/	1.8m\5mm	1 pc	1 pc	1 pc